


SU320HX-1.7RT

Mil-Rugged High Sensitivity InGaAs SWIR Camera with Advanced Dynamic Range Enhancements



The compact **SU320HX-1.7RT** is a Mil-Rugged InGaAs video camera featuring high-sensitivity and wide operating temperature range. It provides real-time daylight to low-light imaging in the Short Wave Infrared (SWIR) wavelength spectrum for persistent surveillance, laser detection, and penetration through fog, dust, and smoke. In addition, the camera employs on-board Automatic Gain Control (AGC), proprietary dynamic-range enhancement technology, and built-in non-uniformity corrections (NUCs), allowing it to address the challenges of urban night imaging **without blooming**. Simultaneous RS170 analog and Camera Link® digital output provide a means for plug-and-play video and high quality 12-bit images for image processing or transmission. The light-weight, compact size, and low power consumption enables easy integration into surveillance systems, whether hand-held, mobile, or aerial. Optional **NIR/SWIR technology** is available to extend the sensitivity of Goodrich cameras down to 0.7 μm , offering the advantage of both Near Infrared (NIR) and Short Wave Infrared wavelength response.

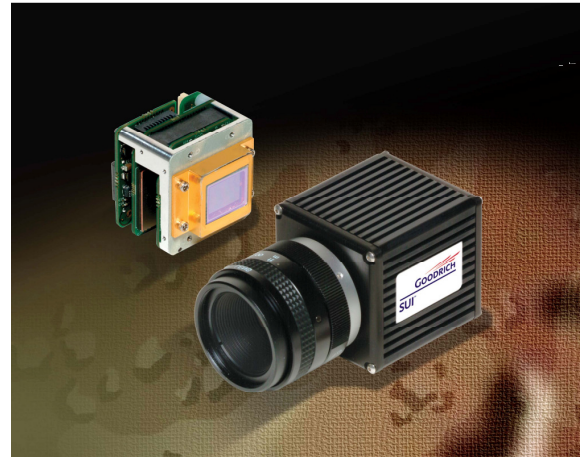


APPLICATIONS

- Low-light level imaging
- Covert surveillance with passive 24 hr/7 day operation
- Driver Vision Enhancement (DVE)
- Imaging through atmospheric obscurants
- OEM version for easy integration into UAVs, handheld, or robotic systems
- Laser spotting and tracking

FEATURES

- Highest sensitivity available in 0.9 to 1.7 μm spectrum; NIR/SWIR, from 0.7 to 1.7 μm
- Images from partial starlight to direct sun illumination
- 320 x 240 pixel format, 40 μm pitch
- Compact OEM module size < 3.8 in³
- Enclosed module size < 9.6 in³
- Operation from -40 °C to 70 °C
- Low power, < 2.9 W at 20 °C
- All solid-state InGaAs imager
- Simultaneous digital & analog outputs
- FCC CE and MIL-461F certified
- MIL-STD-810G qualified for vibration, temperature, altitude, and humidity
- Advanced Automatic Gain Control (AGC)
- Selectable contrast enhancement modes
- User programmable non-uniformity corrections
- Environmental stress screening

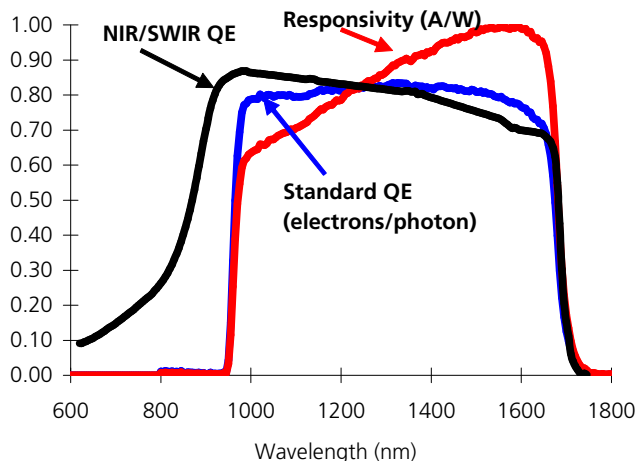

seeing beyond™

Doc. No. 4110-0246 Rev. A ©2011, Goodrich Corporation reserves the right to make product design or specification changes without notice. Effective Date: 16 SEP 2011
Camera Link is a registered trademark of the Automated Imaging Association

3490 U.S. Route 1 • Princeton, New Jersey 08540
Phone: (609) 520-0610 • Fax: (609) 520-0638
www.sensorsinc.com • sui_sales@goodrich.com

Goodrich area cameras and associated technical data are subject to the controls of the International Traffic in Arms Regulations (ITAR). Export, re-export, or transfer of these items by any means to a foreign person or entity, whether in the US or abroad, without appropriate US State Department authorization, is prohibited and may result in substantial penalties.

MECHANICAL SPECIFICATIONS

Model:	Enclosed	OEM
Module dimensions Width x Height x Depth	2.05 x 2.05 x 2.55 inches 52.1 x 52.1 x 64.7 mm (with I/O connectors, excluding lens or mount)	1.64 x 1.50 x 1.54 inches 41.5 x 38.1 x 39.1 mm (excluding lens or mount)
Weight (no lens)	< 270 g	< 90 g
Lens Mount	C-mount adapter in M42x1 mount	M42x1-mount bracket
Camera Link Connector	3M SDR26 Connector	None
I/O Connector	3M SDR14 Connector	None
Interface Connector	Not applicable	Harwin Datamate M80-5020805
Pixel Pitch	40 μ m	
Focal Plane Array Format	320 x 240 pixels	
Active Area	12.8 mm x 9.6 mm x 16 mm diagonal	

ENVIRONMENTAL & POWER SPECIFICATIONS

Operating Case Temperature	-40 $^{\circ}$ C to 70 $^{\circ}$ C
Storage Temperature	-54 $^{\circ}$ C to 85 $^{\circ}$ C
Humidity	95% relative humidity
Power Requirements:	
AC Adapter Supplied	100-240 VAC, 47-63 Hz
DC Voltage	+8-16 V
Power	< 2.9 W @ 20 $^{\circ}$ C (case temperature), < 4.5 W @ 70 $^{\circ}$ C
Functional Shock, Random Vibration, Storage Temperature, Temperature/Altitude Combine, Humidity	MIL-STD-810G compliant
Conducted & Radiated Emissions	CE FCC Part 15 MIL-STD-461F CE102 and RE102
Mean Time Between Failure	> 10,000 hours, MIL-HDBK-217F N2
Fungus-Inert Material	MIL-HDBK-454B

ELECTRICAL SPECIFICATIONS

Optical Fill Factor	100 %
Spectral Response	Standard, 0.9 μ m to 1.7 μ m NIR/SWIR, 0.7 μ m to 1.7 μ m
Quantum Efficiency	Standard, > 65 % from 1 μ m to 1.6 μ m NIR/SWIR, > 65 % from 0.9 μ m to 1.6 μ m
Mean Detectivity, D^* ¹	> 1.0 x 10 ¹⁴ cm ² /Hz/W
Noise Equivalent Irradiance ¹	< 1.0 x 10 ⁸ photons/cm ² ·s
Noise (RMS) ¹	< 20 electrons
Full Well in OPRO (typical)	1.0 x 10 ⁷ electrons
Dynamic Range ⁴	> 3000:1
Operability ²	> 99 %
Preconfigured settings ³	46, with factory-loaded non-uniformity corrections
Exposure Times	0.11 ms to 32.91 ms
Image Correction	2-point (offset and gain) pixel by pixel, user selectable
Digital Output Format	12 bit CameraLink [®] (SDR connector for enclosed version, ribbon for OEM version)
Analog Output Format	Buffered EIA170 compatible video, 30 fps
Digital Output Frame Rate	60 fps
Scan Mode	Continuous or 4 externally triggered modes

¹ λ = 1.55 μ m, exposure time = 16.3 ms, highest sensitivity OPR setting, no lens, x1 digital gain with enhancement, AGC, and correction off.

² The fraction of pixels with responsivity deviation between +/- 25 % from the mean

³ Additional operational settings are programmable via RS-232 commands.

⁴ In high sensitivity OPR settings.

seeing beyond™